




**COFFEE BREAK/Standard Color**




**MORNING MEETING/Standard Color**




**RISE & SHINE/Standard Color**

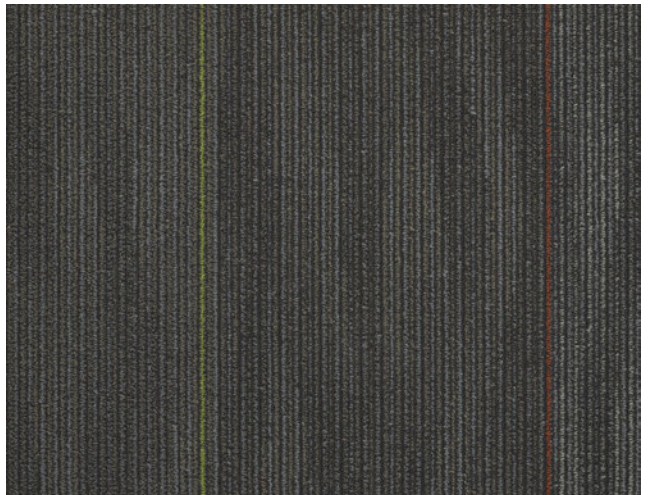

**CLOSING TIME/Standard Color**

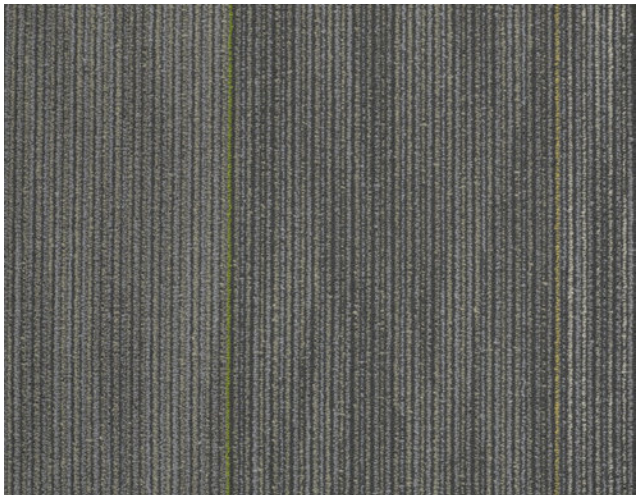


**MONTH END/Standard Color**

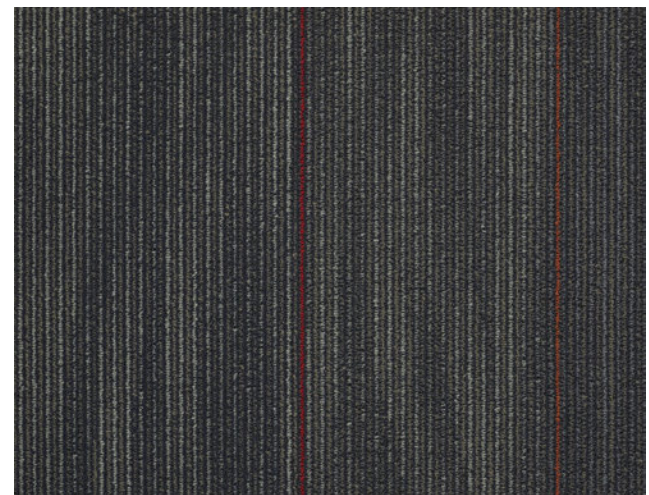

**END OF DAY/Standard Color**



**PRODUCT SPECIFICATIONS**

<b>Style Name</b>	OFFICESMART DAILY PLANNER
<b>Construction</b>	Tufted
<b>Texture</b>	Multi-Level Pattern Loop
<b>Gauge</b>	1/12
<b>Density</b>	5,035
<b>Recycled Content</b>	40.4 %
<b>Stitches per Inch</b>	8.5
<b>Average Pile Height</b>	0.114 inch (2.89 mm)
<b>Fiber</b>	Premium Branded ECO Solution Q Nylon
<b>Dye Method</b>	100% Solution Dyed
<b>Tufted Yarn Weight</b>	16 oz. per sq. yd. (542.49 g/m <sup>2</sup> )
<b>Standard Size</b>	24" x 24" (60.9 cm x 60.9 cm)
<b>Primary Backing System</b>	Non-Woven Synthetic
<b>Secondary Backing System</b>	EcoWorx® Backing: 100% PVC-Free, Phthalate-Free, Recyclable, and Made from Recycled Material
<b>Protective Treatments</b>	ssp® Shaw Soil Protection
<b>Indoor Air Quality</b>	Green Label Plus Certification
<b>Cradle to Cradle Certification™</b>	Silver level
<b>Installation Method</b>	
<b>Flammability</b>	ASTM E-648 Flooring Radiant Panel - Class 1 (Less than or equal to .45 W/cm <sup>2</sup> )
<b>Smoke Density</b>	ASTM E-662 NBS - Less than 450
<b>TARR</b> (Texture and Appearance Retention Rating)	Heavy Duty: >3.0
<b>Electrostatic Propensity</b>	AATCC 134-06 – Less than 2.0 kV (2,000 volts)
<b>Warranty</b>	Lifetime Limited Commercial Warranty Lifetime Static Properties
<b>Availability</b>	No Minimum Order Requirement

**FEATURES & BENEFITS**

**LEVEL 1 PROTECTION**

- Minimizes nuisance static shocks
- Two times more effective than standard commercial grade carpet
- All OFFICESMART™ series carpet tile is manufactured using FiberSmart™ technology
- OFFICESMART™ tile is designed for high traffic/high use networked environments to minimize nuisance static and to provide additional protection against static damage

**ENVIRONMENTAL:**

- Cradle to Cradle Certified™ Silver
- Recipient of EPA Green Chemistry Challenge Award
- PVC free backing system
- 40% recycled content contributing to LEED product certification
- 40% lighter in weight than traditional carpet tile backing
- Low VOC's meeting CRI Green Label and Green Label Plus requirements

**IDEAL FOR:**

- Waiting rooms/conference rooms
- Offices
- Lobbies
- Common areas

**PROTECTION METER**



eco•worx® tile



**LEVEL 1 STATIC PROTECTION**

\*Ecoworx® is a registered trademark of Shaw, a Berkshire Hathaway Company \*\*This information is accurate and current but may be subject to change without notice. REV 04/15