



TAKEOVER/Standard Color




CONTINGENCY/Standard Color

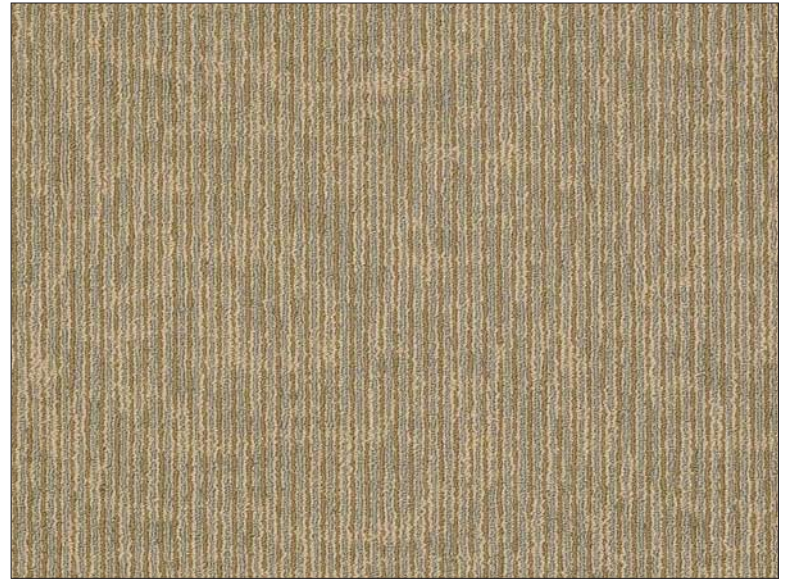

INCENTIVE/Standard Color

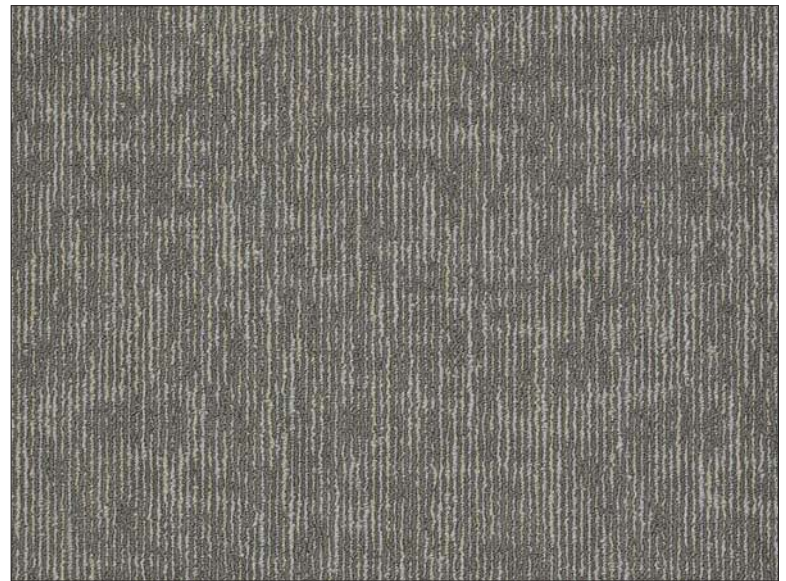

SCALABLE/Standard Color

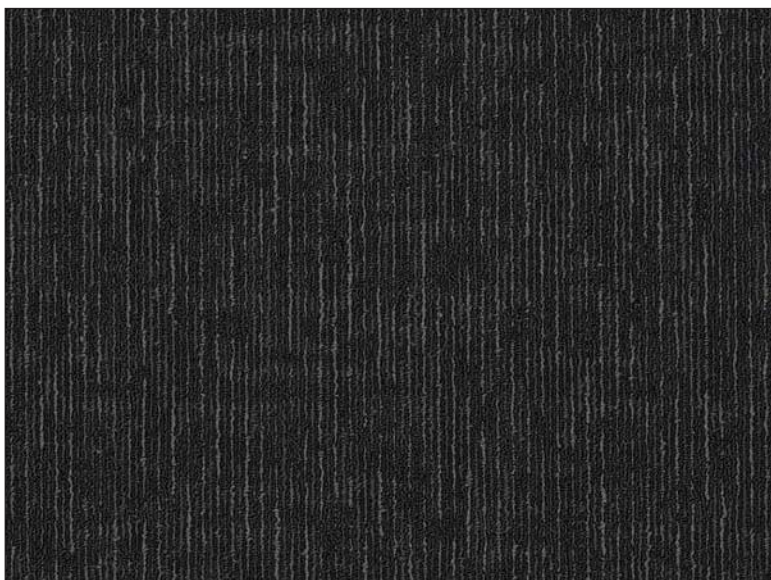

DILIGENCE/Standard Color



STRATEGIZE/Standard Color

OfficeSmart® Boardroom Series

Level 1 Antistatic Carpet Tile

PHYSICAL PROPERTIES

Construction	Tufted
Texture	Multi-Level Pattern Loop
Gauge	1/10
Density	5,184
Recycled Content	44.4%
Stitches per Inch	11.5
Average Pile Height	0.125 inch (3.18 mm)
Fiber	Premium Branded ECO Solution Q Nylon
Dye Method	100% Solution Dyed
Conductive Fiber Technology	Continuous Conductive StaticSmart Monofilament
Tufted Yarn Weight	18 oz. per sq. yd. (610.30 g/m ²)
Standard Size	24" x 24" (60.9 cm x 60.9 cm)
Installation Method	



ANTISTATIC CONTROL PROPERTIES

Electrostatic Propensity	AATCC 134-06 Less than 2.0 kV (2,000 volts)
Adhesive Requirement	Shaw 5001 Pressure Sensitive

Primary Backing System	Non-Woven Synthetic
Secondary Backing System	EcoWorx® Backing: 100% PVC-Free, Phthalate-Free, Recyclable and made from Recycled Material
Protective Treatments	ssp® Shaw Soil Protection
Indoor Air Quality	Green Label Plus Certification
Cradle to Cradle Certification™	Silver Level
Flammability	ASTM E-648 Flooring Radiant Panel - Class 1
Smoke Density	ASTM E-662 NBS Less than 450
TARR (Texture & Appearance Retention Rating)	Heavy Duty: >3.0
Warranty	Lifetime Static Protection Lifetime Limited Commercial Warranty
Availability	No Minimums
Packaging	12 tiles per carton / 5.33 sq. yd.