



OPEN FORUM/Standard Color

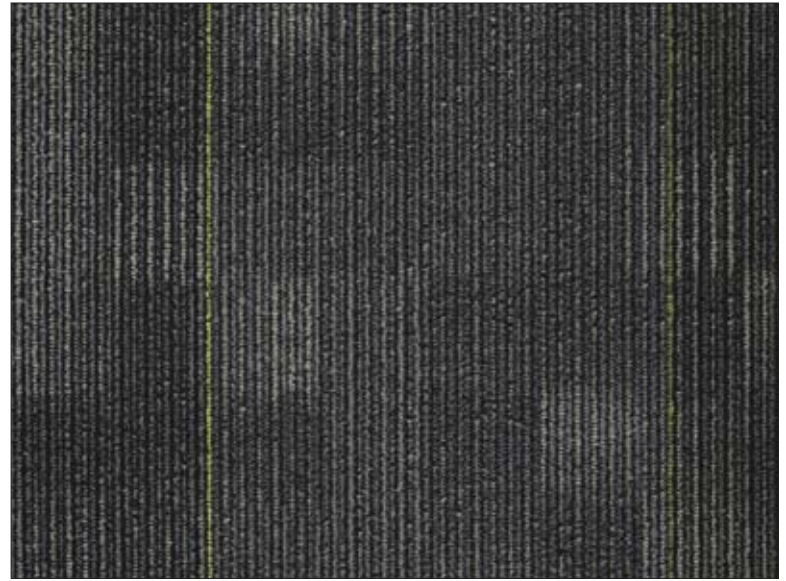

TASK FORCE/Standard Color

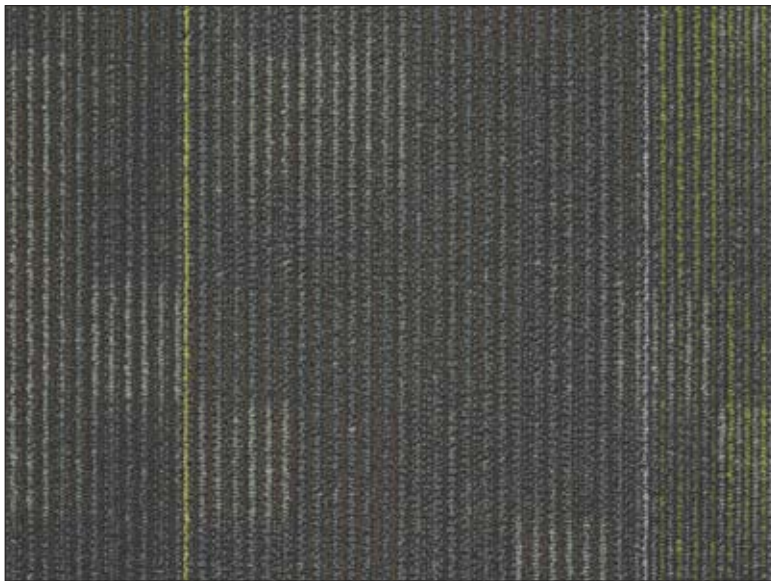


THOUGHT LEADER/Standard Color



BRAINSTORM/Standard Color



TEAMWORK/Standard Color

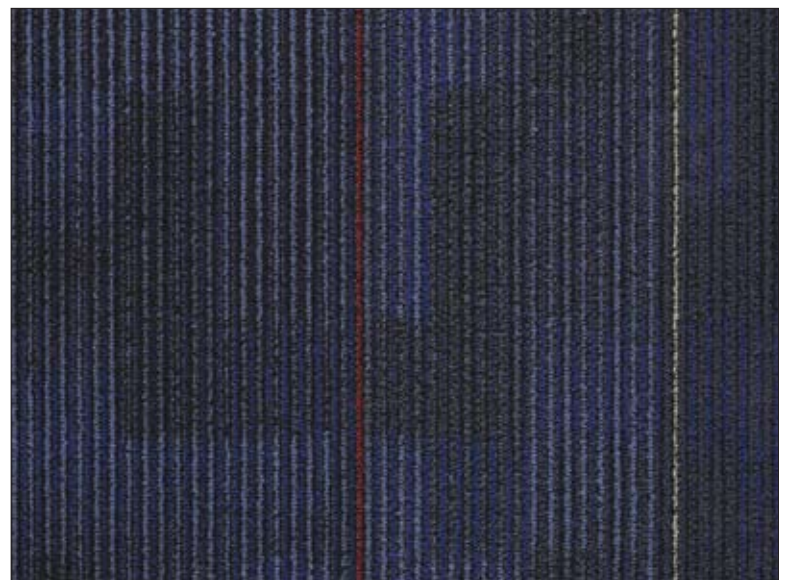

THINK TANK/Standard Color

OfficeSmart® Collaborators Series

Level 1 Antistatic Carpet Tile

PHYSICAL PROPERTIES

Construction	Tufted
Texture	Multi-Level Pattern Loop
Gauge	1/12
Density	4,923
Recycled Content	40.4%
Stitches per Inch	9.0
Average Pile Height	0.114 inch (2.9 mm)
Fiber	Premium Branded ECO Solution Q Nylon
Dye Method	100% Solution Dyed
Conductive Fiber Technology	Continuous Conductive StaticSmart Monofilament
Tufted Yarn Weight	16 oz. per sq. yd. (542.49 g/m ²)
Standard Size	24" x 24" (60.9 cm x 60.9 cm)
Installation Method	



ANTISTATIC CONTROL PROPERTIES

Electrostatic Propensity	AATCC 134-06 Less than 2.0 kV (2,000 volts)
Adhesive Requirement	Shaw 5001 Pressure Sensitive

Primary Backing System	Non-Woven Synthetic
Secondary Backing System	EcoWorx® Backing: 100% PVC-Free, Phthalate-Free, Recyclable and made from Recycled Material
Protective Treatments	ssp® Shaw Soil Protection
Indoor Air Quality	Green Label Plus Certification
Cradle to Cradle Certification™	Silver Level
Flammability	ASTM E-648 Flooring Radiant Panel - Class 1
Smoke Density	ASTM E-662 NBS - Less than 450
TARR	Heavy Duty: >3.0
<small>(Texture & Appearance Retention Rating)</small>	
Warranty	Lifetime Static Protection Lifetime Limited Commercial Warranty
Availability	No Minimums
Packaging	12 tiles per carton / 5.33 sq. yd.