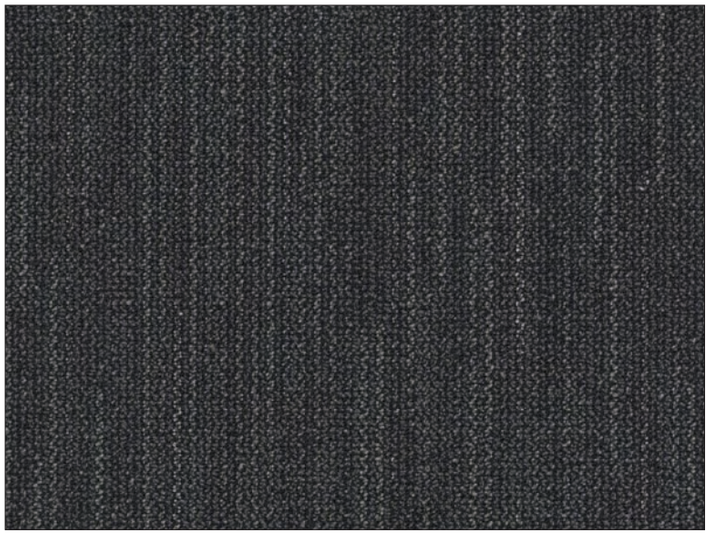

HIGHRISE/Standard Color

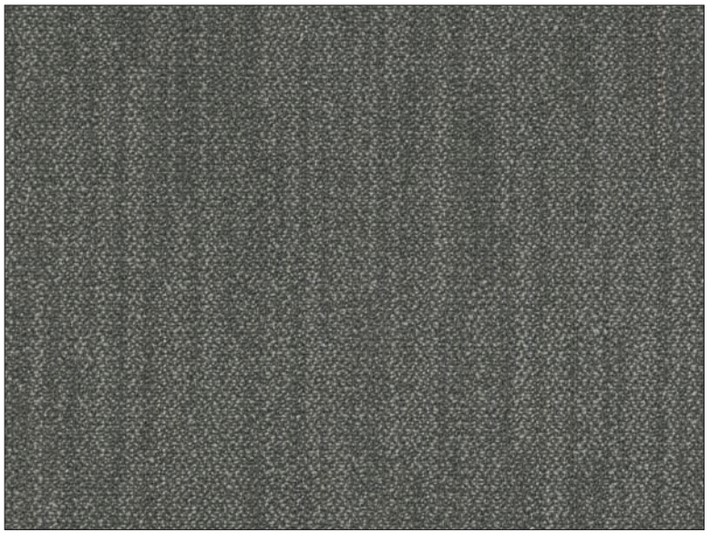

HOME OFFICE/Standard Color

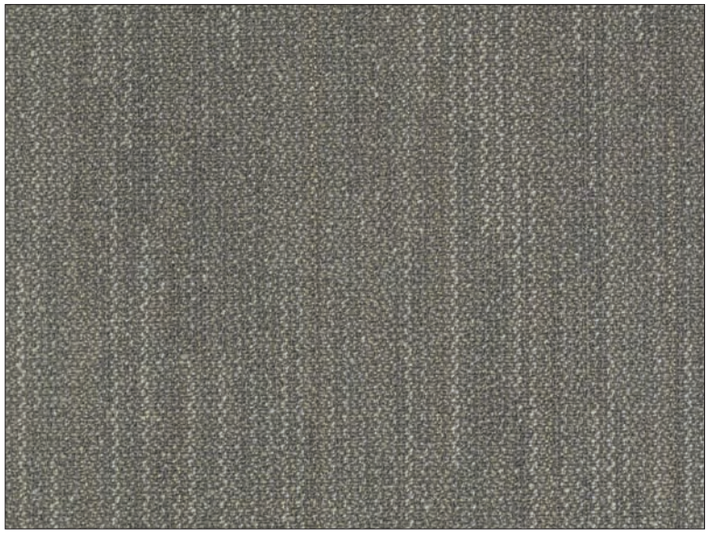

CORNER OFFICE/Standard Color

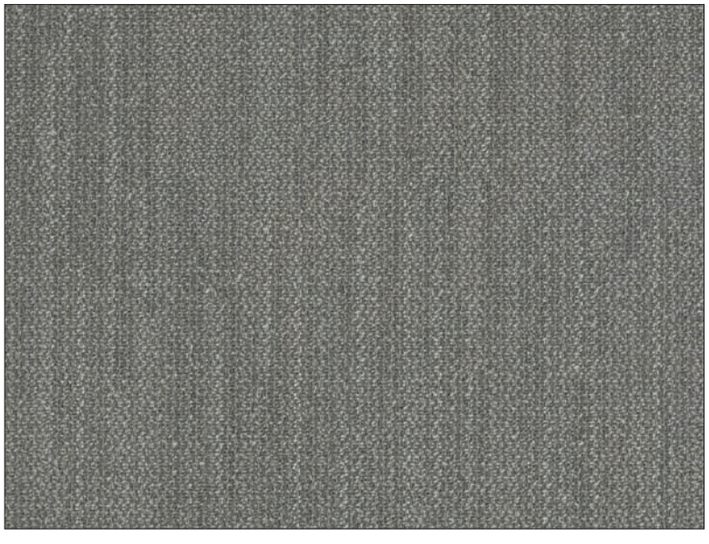

ON THE ROAD/Standard Color

COFFEE SHOP/Standard Color

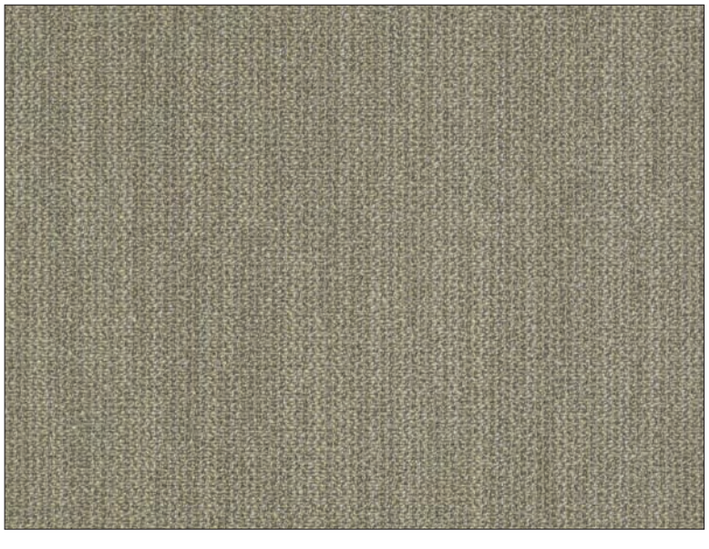

DOWNTOWN/Standard Color

STATICSMART
FLOORING BY JULIE INDUSTRIES

Product Specs

OfficeSmart® Workspace Series — Level 1 Antistatic Carpet Tile

PHYSICAL PROPERTIES

Construction	Tufted
Texture	Multi-Level Pattern Loop
Gauge	1/12
Density	5,829
Recycled Content	46%
Stitches per Inch	9.0
Average Pile Height	0.105 inch (2.67 mm)
Fiber	Premium Branded ECO Solution Q Nylon
Dye Method	100% Solution Dyed
Conductive Fiber Technology	Continuous Conductive StaticSmart Monofilament
Tufted Yarn Weight	17 oz. per sq. yd. (576.40 g/m2)
Standard Size	24" x 24" (60.9 cm x 60.9 cm)
Installation Method	

Primary Backing System	Non-Woven Synthetic
Secondary Backing System	EcoWorx® Backing: 100% PVC-Free, Phthalate-Free, Recyclable and made from Recycled Material
Protective Treatments	ssp® Shaw Soil Protection
Indoor Air Quality	Green Label Plus Certification
Cradle to Cradle Certification™	Silver Level
Flammability	**ASTM E-648** Flooring Radiant Panel - Class 1
Smoke Density	**ASTM E-662 NBS** - Less than 450
TARR	Heavy Duty: >3.0
(Texture & Appearance Retention Rating)	
Warranty	Lifetime Static Protection Lifetime Limited Commercial Warranty
Availability	No Minimums
Packaging	12 tiles per carton / 5.33 sq. yd.

ANTISTATIC CONTROL PROPERTIES

Electrostatic Propensity	**AATCC 134-06** Less than 2.0 kV (2,000 volts)
Adhesive Requirement	Shaw 5001 Pressure Sensitive

PO Box 153, North Reading, MA 01864 | Ph: (978) 276-0820 | Fax: (978) 276-0821 | www.staticsmart.com