



FAIRBANKS

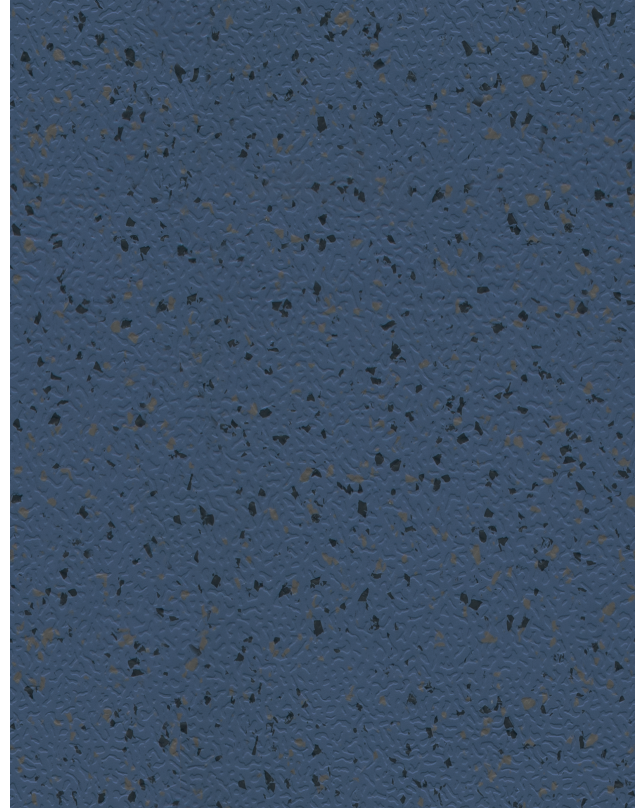

JUNEAU

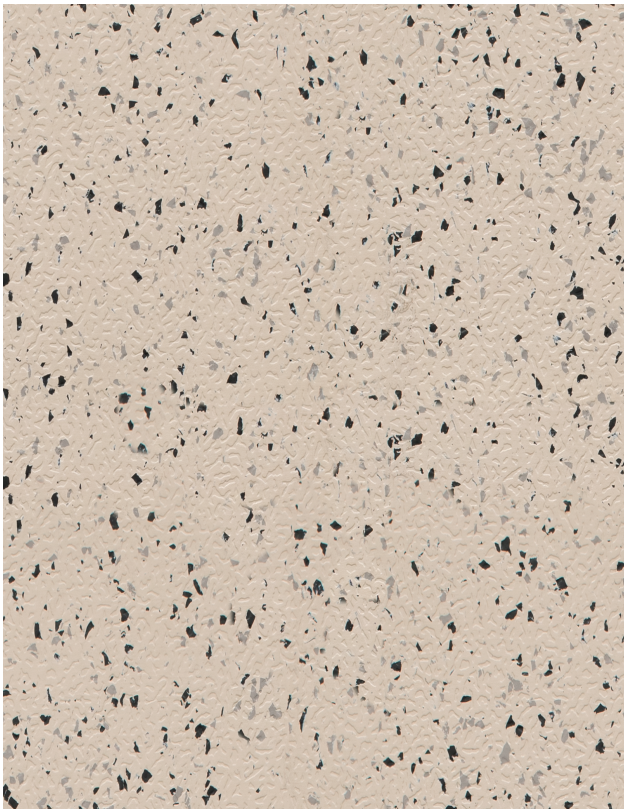

KODIAK



NOME

PRODUCT SPECIFICATIONS

PHYSICAL PROPERTIES		STATIC CONTROL PROPERTIES	
ASTM F1344 <i>Rubber Floor Tile</i>	Class I, Type B	Electrostatic Propensity (w/conductive footwear)	ANSI/ESD STM 97.2 — Less than 20 V
Composition	Homogenous Rubber Tile	Electrical Resistance	ANSI/ESD STM 7.1 1.0×10^6 — 1.0×10^9 ohms
Recycled Content	N/A		
Thickness (Gauge)	2.0 mm		
Nominal Sizes	24" x 24"	Electrical Resistance & Voltage	ANSI/ESD S20.20 2014
Indoor Air Quality	FloorScore® Certified	Generation Footwear/Flooring System	Compliant when using approved footwear. Results within required limits: $<1 \times 10^9$ ohms and <100 volts peak
LEED v2009 IEQ Credit 4.1	Qualifies		
LEED v2009 IEQ Credit 4.3	Qualifies		
ASTM E-648-06a (NFPA 263) <i>Critical Radiant Flux</i>	Class I, $> 0.45 \text{ W/cm}^2$	D.O.D. HDBK236A, Section 40.1.2	Meets recommended guidelines for sensitive ESD Devices, Class 1.
ASTM 662-06 (NFPA 258) <i>Smoke Density</i>	< 450	FAA-STD-019f	Compliant
ASTM F-925-02 <i>Chemical Resistance</i>	Excellent	Motorola R56	Compliant
ASTM F-970-07 (modified) <i>Static Load</i>	1,100 PSI	ATIS-0600321.2010	Compliant
ASTM D2047 <i>Slip Resistance</i>	> 0.6	Groundable Path	StaticSmart® Ground Strip
Warranty	Lifetime Static Protection 10 Year Limited Commercial Warranty	Grounding Frequency	1 per 1,000 sq. ft.
Packaging	24" tile: 80 sq. ft. per box	Adhesive Requirements	StaticSmart® SDT+ Conductive Adhesive
Availability	No Minimums		



**This information is accurate and current but may be subject to change without notice. REV 02/20