





FAIRBANKS

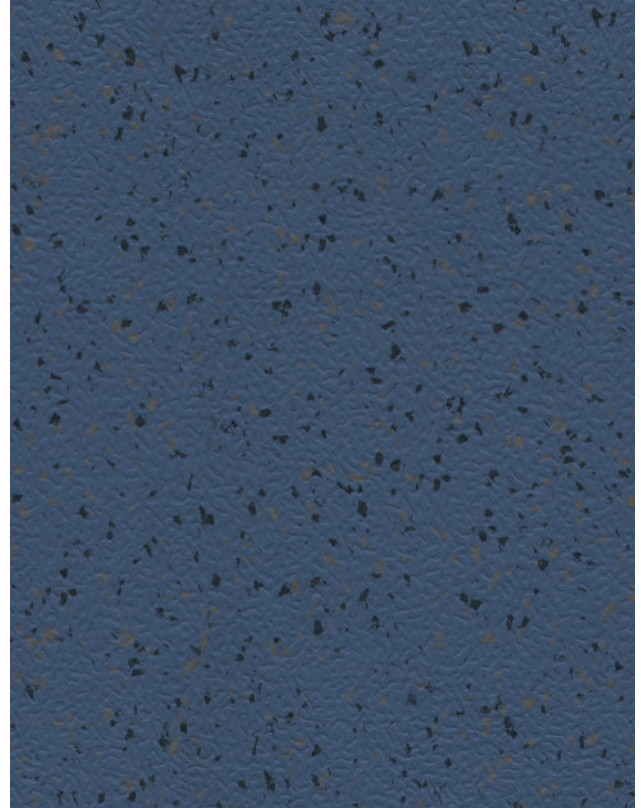

JUNEAU

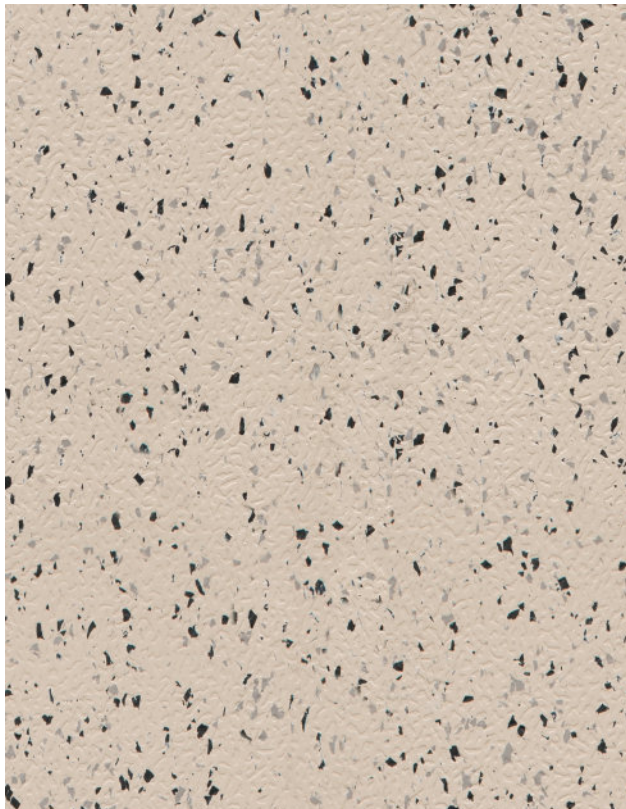

KODIAK



NOME

PRODUCT SPECIFICATIONS

PHYSICAL PROPERTIES

ASTM F1344 <i>Rubber Floor Tile</i>	Class I, Type B
Composition	Homogenous Rubber Tile
Recycled Content	N/A
Thickness (Gauge)	2.0 mm
Nominal Sizes	24" x 24"
Indoor Air Quality	FloorScore® Certified
LEED v2009 IEQ Credit 4.1	Qualifies
LEED v2009 IEQ Credit 4.3	Qualifies

ASTM E-648-06a (NFPA 263) <i>Critical Radiant Flux</i>	Class I, > 0.45 W/cm ²
ASTM 662-06 (NFPA 258) <i>Smoke Density</i>	< 450
ASTM F-925-02 <i>Chemical Resistance</i>	Excellent
ASTM F-970-07 (modified) <i>Static Load</i>	1,100 PSI
ASTM D2047 <i>Slip Resistance</i>	> 0.6

Warranty	Lifetime Static Protection 10 Year Limited Commercial Warranty
Packaging	24" tile: 80 sq. ft. per box
Availability	No Minimums

STATIC CONTROL PROPERTIES

Electrostatic Propensity (w/conductive footwear)	ANSI/ESD STM 97.2 — Less than 20 V
Electrical Resistance	ANSI/ESD STM 7.1 1.0 x 10 ⁶ — 1.0 x 10 ⁹ ohms
Electrical Resistance & Voltage <i>Generation Footwear/Flooring System</i>	ANSI/ESD S20.20 2014 Compliant when using approved footwear. Results within required limits: <1 x 10 ⁹ ohms and <100 volts peak
D.O.D. HDBK236A, Section 40.1.2	Meets recommended guidelines for sensitive ESD Devices, Class 1.
FAA-STD-019f	Compliant
Motorola R56	Compliant
ATIS-0600321.2010	Compliant
Groundable Path	StaticSmart® Ground Strip
Grounding Frequency	1 per 1,000 sq. ft.
Adhesive Requirements	StaticSmart® SDT+ Conductive Adhesive



**This information is accurate and current but may be subject to change without notice. REV 02/20