




ALLIANCE/Standard Color

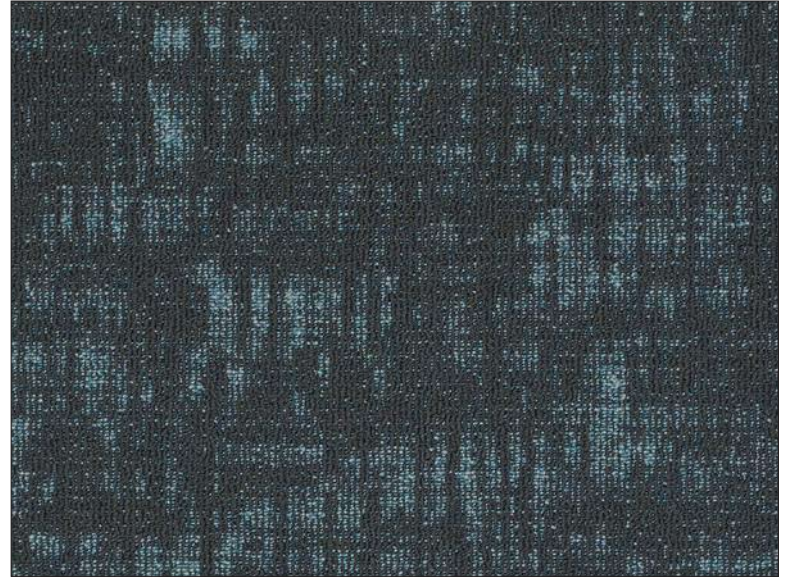

ACQUISITION/Standard Color

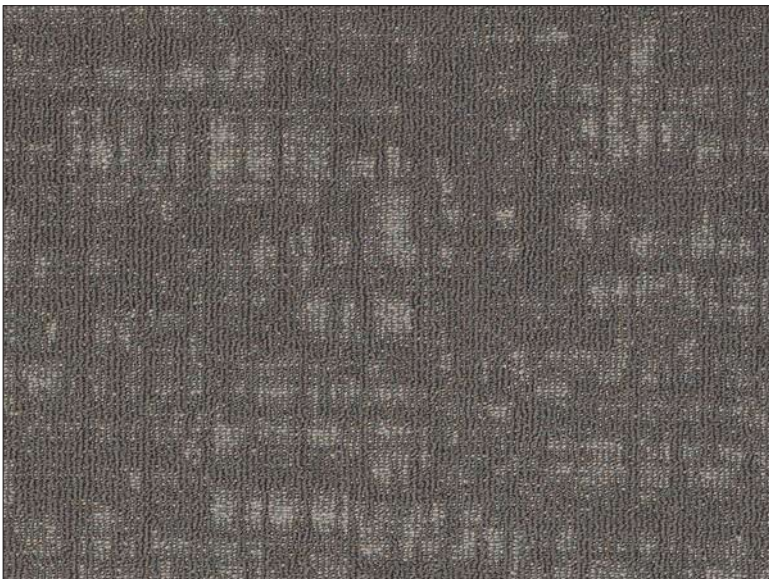


CONSOLIDATION/Standard Color

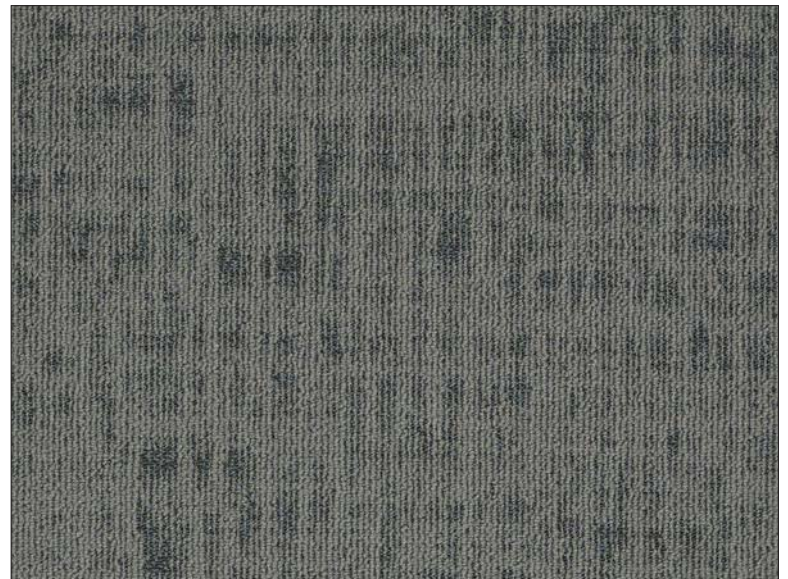

MERGER/Standard Color



PARTNERSHIP/Standard Color

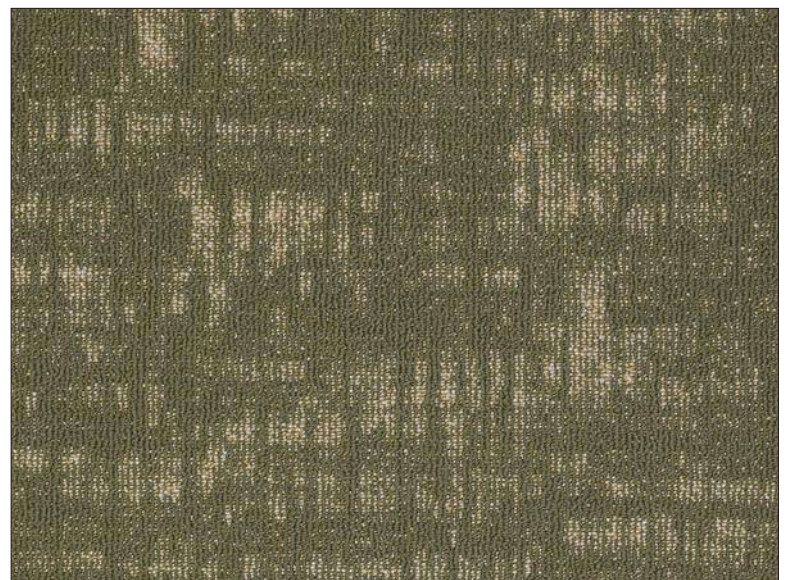


JOINT VENTURE/Standard Color

STATICS M A R T

F L O O R I N G B Y J U L I E I N D U S T R I E S

PRODUCT SPECIFICATIONS

Style Name	OFFICESMART RESTRUCTURE
Construction	Tufted
Texture	Multi-Level Pattern Loop
Gauge	1/12
Density	6,236
Recycled Content	44.4 %
Stitches per Inch	10
Average Pile Height	0.127 inch (3.23 mm)
Fiber	Premium Branded ECO Solution Q Nylon
Dye Method	100% Solution Dyed
Tufted Yarn Weight	22 oz. per sq. yd. (745.93 g/m2)
Standard Size	24" x 24" (60.9 cm x 60.9 cm)
Primary Backing System	Non-Woven Synthetic
Secondary Backing System	EcoWorx® Backing: 100% PVC-Free, Phthalate-Free, Recyclable, and Made from Recycled Material
Protective Treatments	ssp® Shaw Soil Protection
Indoor Air Quality	Green Label Plus Certification
Cradle to Cradle Certification™	Silver level
Installation Method	
Flammability	ASTM E-648 Flooring Radiant Panel - Class 1 (Less than or equal to .45 W/cm2)
Smoke Density	ASTM E-662 NBS - Less than 450
TARR (Texture and Appearance Retention Rating)	Heavy Duty: >3.0
Electrostatic Propensity	AATCC 134-06 – Less than 2.0 kV (2,000 volts)
Warranty	Lifetime Limited Commercial Warranty Lifetime Static Properties
Availability	No Minimum Order Requirement

FEATURES & BENEFITS

LEVEL 1 PROTECTION

- Minimizes nuisance static shocks
- Two times more effective than standard commercial grade carpet
- All OFFICESMART™ series carpet tile is manufactured using FiberSmart™ technology
- OFFICESMART™ tile is designed for high traffic/high use networked environments to minimize nuisance static and to provide additional protection against static damage

ENVIRONMENTAL:


- Cradle to Cradle Certified™ Silver
- Recipient of EPA Green Chemistry Challenge Award
- PVC free backing system
- 40% recycled content contributing to LEED product certification
- 40% lighter in weight than traditional carpet tile backing
- Low VOC's meeting CRI Green Label and Green Label Plus requirements

IDEAL FOR:

- Waiting rooms/conference rooms
- Offices
- Lobbies
- Common areas



ACQUISITION/Application Room View

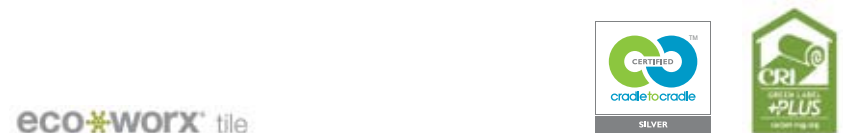

LEVEL 1 STATIC PROTECTION

*Ecoworx® is a registered trademark of Shaw, a Berkshire Hathaway Company **This information is accurate and current but may be subject to change without notice. REV 04/15