




ADAMS/Standard Color



WASHINGTON/Standard Color

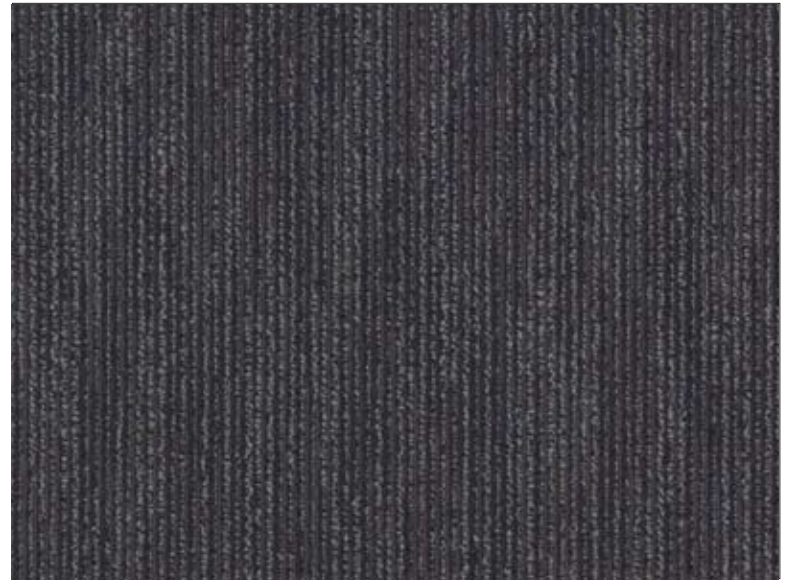


JACKSON/Standard Color



MADISON/Standard Color



ROOSEVELT/Standard Color

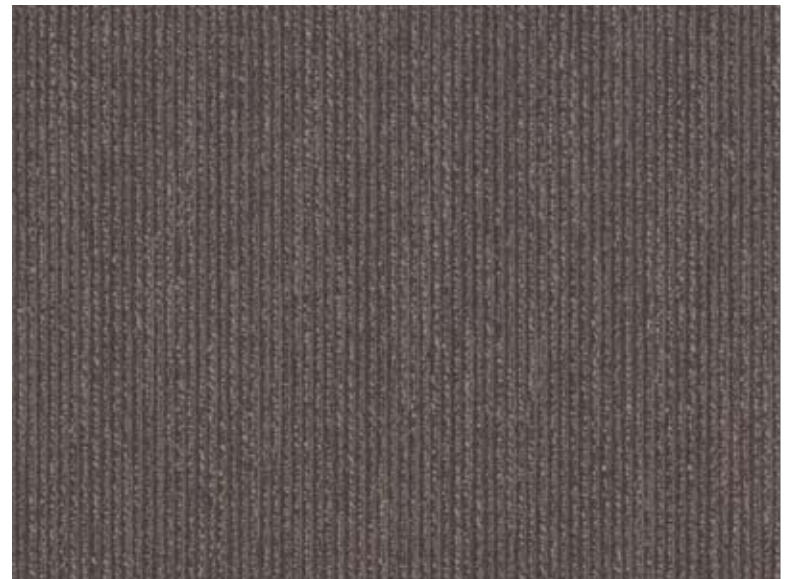


TRUMAN/Standard Color

STATICS M A R T

F L O O R I N G B Y J U L I E I N D U S T R I E S

PRODUCT SPECIFICATIONS

Style Name	Presidential Series
Construction	Tufted
Texture	Textured Loop
Gauge	1/10
Density	6,754
Recycled Content	42.1 %
Stitches per Inch	10.0
Average Pile Height	0.121 inch (3.07 mm)
Fiber	Premium Branded ECO Solution Q Nylon
Dye Method	100% Solution Dyed
Conductive Fiber Technology	Continuous Conductive StaticSmart FibreLink™ Monofilament in Every Tuft
Tufted Yarn Weight	22 oz. per sq. yd. (745.93 g/m2)
Standard Size	24" x 24" (60.9 cm x 60.9 cm)
Primary Backing System	Conductive Non-Woven Synthetic
Secondary Backing System	Conductive EcoWorx® Backing: 100% PVC-Free, Phthalate-Free, Recyclable, and Made from Recycled Material
Protective Treatments	ssp® Shaw Soil Protection
Indoor Air Quality	Green Label Plus Certification
NSF 140	Platinum
Installation Method	 quarter turr ashlar
Flammability	ASTM E-648 Flooring Radiant Panel - Class 1 (Less than or equal to .45 W/cm2)
Smoke Density	ASTM E-662 NBS - Less than 450
TARR	Heavy: >3.0
(Texture and Appearance Retention Rating)	
Warranty	Lifetime Limited Commercial Warranty Lifetime Static Properties
Availability	No Minimum Order Requirement




PRESIDENTIAL SERIES/Application Room View

LEVEL 3 STATIC PROTECTION

Electrostatic Propensity	ESD STM 97.2 (w/Conductive Footwear) — Less than 20 Volts AATCC 134-06 (w/o Conductive Footwear) — Less than 0.4 kV (400 Volts)
Electrical Resistance	ESD S7.1/NFPA 99 Resistive/Resistance Characterization of Materials: RTT Six or More Readings Between Points Placed 3 Feet Apart. Tested with an Applied Voltage of 100V. Measured in Ohms, 2.5×10^4 Minimum, 1.0×10^8 Maximum. RTG Six or More Readings from Surface to Groundable Point. Tested with an Applied Voltage of 100V. Measured in Ohms, 2.5×10^4 Minimum, 1.0×10^8 Maximum Static Dissipative: 1.0×10^6 Min., 1.0×10^9 Max. Ohms Electrical Resistance / Voltage Test Footwear/Flooring System per ANSI/ESD S-20.20 - 2014 , Compliant when Using Approved Conductive Footwear. Results within Required Limits: $< 1 \times 10^9$ Ohms and < 100 Volts D.O.D. HDBK263A, Section 40.1.2: Meets Recommended Guidelines for Sensitive ESD Devices, Class 1 FAA-STD-019f, Motorola R56 and ATIS-0600321.2010 compliant Roller Caster Electrical Test (CET) Assessment: After 100,000 Chair Caster Cycles There was No Appreciable Change in Conductivity or Electrical Performance. Lab Data Available on Request StaticSmart Ground Strip or RTG Connector Kit 1 per 1,000 Square Feet Conductive Releasable Adhesive for Carpet Tile: 1.0×10^6 Ohms RTT
Groundable Path	
Grounding Frequency	
Adhesive Requirement	

eco*worx® tile

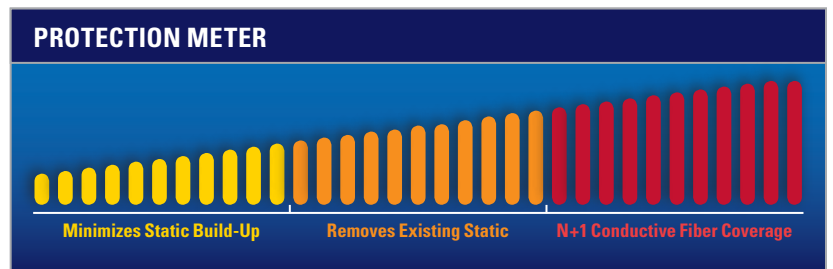

LEVEL 3 STATIC PROTECTION

*Ecoworx® is a registered trademark of Shaw, a Berkshire Hathaway Company **This information is accurate and current but may be subject to change without notice. REV 04/15