


EVEREST C6101/Standard Color



KATAHDIN C6004/Standard Color

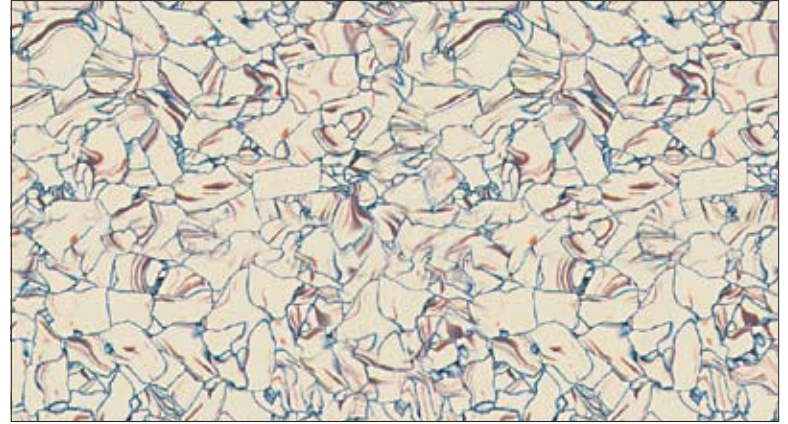


McKINLEY C6001/Standard Color




RAINIER C6005/Standard Color



QUARTZ C6111/Standard Color

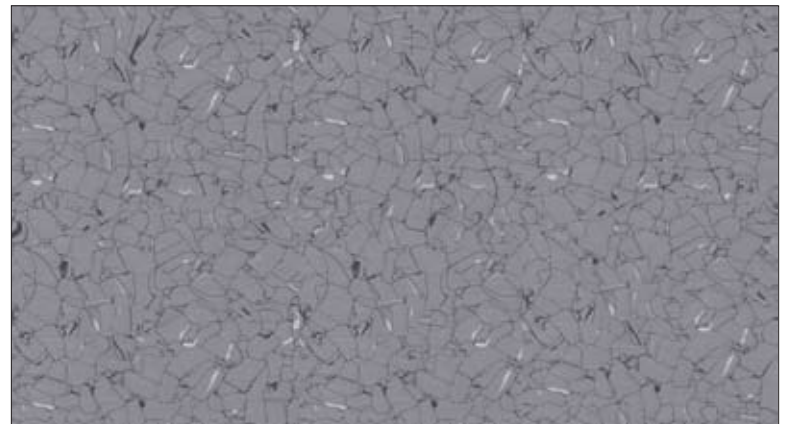

GREYLOCK C6062/Standard Color

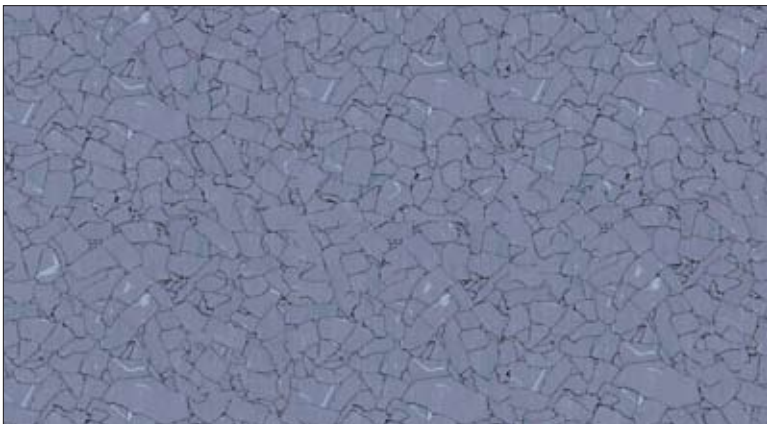

WASHINGTON C6092/Standard Color



ONYX C6141/Standard Color

STATICSMART

FLOORING BY JULIE INDUSTRIES

PRODUCT SPECIFICATIONS

Style Name	Summit Series
ASTM F-1700 <i>Solid Vinyl Floor Covering Materials</i>	Conforms
Composition	Homogenous Solid Vinyl Tile
Recycled Content	N/A
Thickness (Gauge)	1/8" (3mm)
Nominal Sizes	12" x 12"
Indoor Air Quality	FloorScore® Certified
NFPA 99 <i>Standard for Healthcare Facilities</i>	Passes
NFPA 101 <i>Life Safety Code</i>	Passes
ANSI/UL 779 <i>Electrically Conductive Floor Covering</i>	Meets UL standards
ASTM E-84 <i>Fire Spread</i>	< 75 (Class II)
ASTM E-648-06a <i>Critical Radiant Flux CRF (W/cm²)</i>	> 1.08 W/cm² (NFPA 253 Class 1)
ASTM 662-06 <i>Smoke Density</i>	< .450
ASTM F-925-02 <i>Chemical Resistance</i>	Excellent
ASTM F-970-07 <i>Static Load</i>	2,500 PSI
Warranty	Lifetime Static


LEVEL 3 STATIC PROTECTION

Electrostatic Propensity	ESD STM 97.2 (w/conductive footwear) — Less than 20 Volts AATCC 134-06 (w/o conductive footwear) — Less than 2.0 kV (2,000 Volts)
Electrical Resistance	ANSI/ESD S7.1 Surface to Surface Conductive: $2.5 \times 10^4 - 10^6 \Omega$ Surface to Ground Conductive: $2.5 \times 10^4 - 10^6 \Omega$
ASTM E-101C <i>Static Decay, Method 4046 at 15% RH</i>	5000 - 0 Volts in < 0.01 seconds
Electrical Resistance/Voltage Test Footwear/Flooring system per ANSI/ESD S20.20 - 2014	Compliant when using approved conductive footwear. Results within Required Limits: < 1×10^9 Ohms and < 100 Volts peak
D.O.D. HDBK 263A, Section 40.1.2	Meets recommended guidelines for sensitive ESD devices, Class 1
FAA-STD-019f, Motorola R56, ATIS-0600321.2010	Compliant
Groundable Path	StaticSmart Ground Strip
Grounding Frequency	1 per 1,000 Square Feet
Adhesive Requirement	5100 SD Conductive Adhesive or Spray-Lock 1005 ESD



EVEREST/Application Room View

**This information is accurate and current but may be subject to change without notice.*

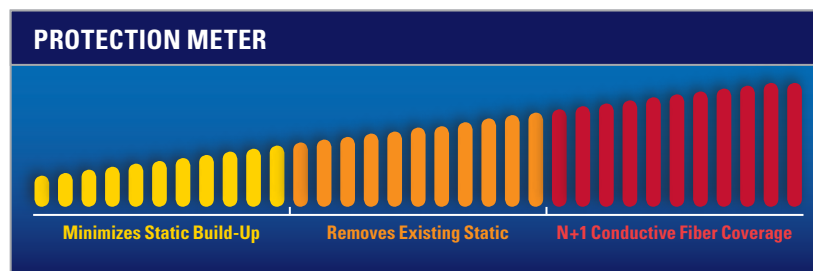

LEVEL 3 STATIC PROTECTION